




This detail is for general guidance only and is not project specific. Always refer to the project architect details and the PAREX project specific specification.

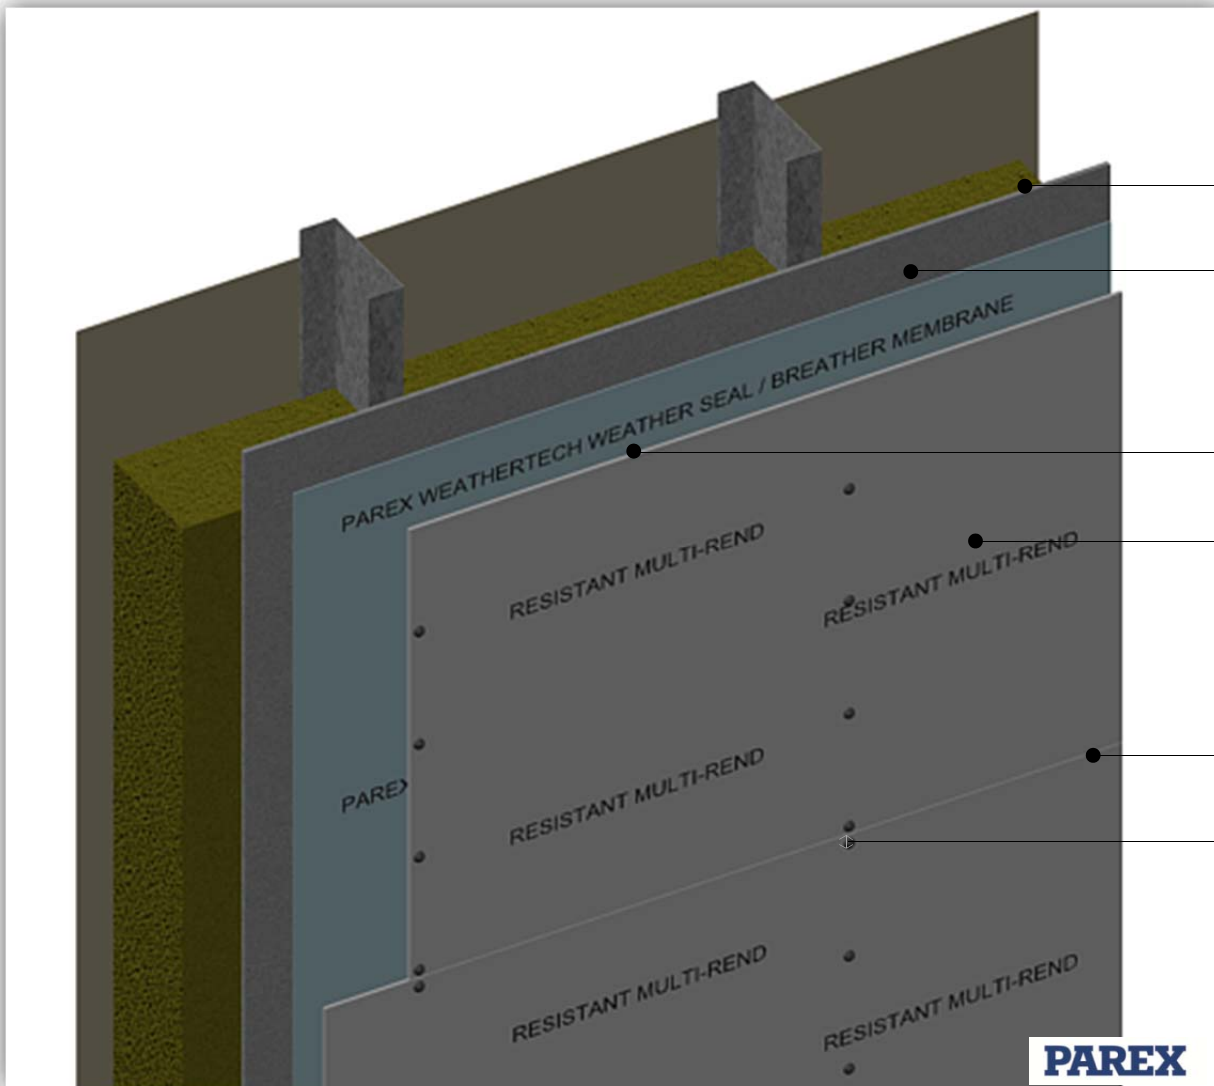

Insulation
(by others)

Sheathing board
(by others)

Parex WeatherTech
Weatherseal or
proprietary breather
membrane
(by others, if required)

Resistant Multi-Rend
render board

Resistant Multi-Rend
board requires a gap
between the boards
(For gap required, refer
to board manufacturers
requirements)

Minimum 15mm
(From edge of board
to centre of fixing)

To ensure you meet with project specific requirements, consult the Resistant Multi-Rend render board fixing requirements. All fixings to be Resistant Multi-Rend non-corrosive and of sufficient length and performance. The fixing distances shown are for guidance only and may vary subject to the building design. If you are unsure please ask first.

System: PAREX THERM onto Steel Frame

Application: PAREX THERM system onto Resistant Multi-Rend render board – Board Fixing

Drawing No: PTSNC0501

Date: December 2015